



XL1

• \_\_\_ \* Est. 1979 \*----

Next Generation,
Ultra High-Capacity
Hydration Center

Experience on-demand chilling, high-capacity, and intuitive features



### **Unmatched Capacity**

With the largest cold tank on the market, the XL1 offers nearly limitless ice-cold water.



#### Intuitive

The XL1 adapts to your routine by monitoring usage patterns, tracking filter life, and identifying service needs, providing you with peace of mind.



## **Interactive User Experience**

The 15.6" full-color touchscreen offers customizable options for adjusting dispense speed and volume.



#### **Advanced Purification**

Ultra high-capacity multi-stage reverse osmosis with mineral add-back and dual intank LED UV lights ensure pure, fresh water every time.





## **Key Features**

- · Hyper chill fully wrapped cold tank for instant chilling
- Extra large dispense area: 14.68 Inches
- Fast dispense rate: up to 4 liters per minute
- Modern user interface: 15.6-Inch full-color touch display with customizable options
- Ultra clean: two in-tank led UV lights to maintain cleanliness

- Patented cold recirculation: ensures every cup of water is ice-cold
- Energy efficient: eco mode for energy saving
- Long life filters: 20,000 gallon pre-filters and dual high consumption ROs (200 gpd)
- Advanced diagnostics: calculates service warnings and filter life for hassle-free maintenance
- Leak detection: equipped with electronic leak stop

# **Specifications**

Water Options: Cold, Ambient, and Hot Water

Tank Capacity Cold: 5 gallons, fully wrapped for instant chilling

Ambient: **2.5 gallons** Hot: **1.1 gallon** 

Dimensions: **H: 68.5" x W: 18.89" x D: 20.4"** 

Weight: 155 lbs

Dispense Area: **H: 14.68" x W: 8.23"** 

Electrical: 15V, 60Hz, 5.4A

#### **Certifications**


Certifications to ensure electrical compliance and safety

UL 399, CSA CAN C22.2 No. 120-13\*

#### **Certifications for water quality**

NSF-372, CSA B483.1-2007\*, NSF-61\*, NSF-42

\* Pending approval

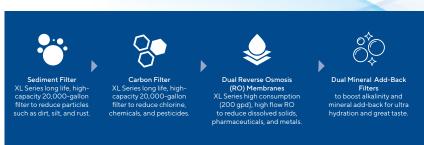







SMYRNA 770-434-3050 NORTH FULTON 770-408-1880